


SDIP 30

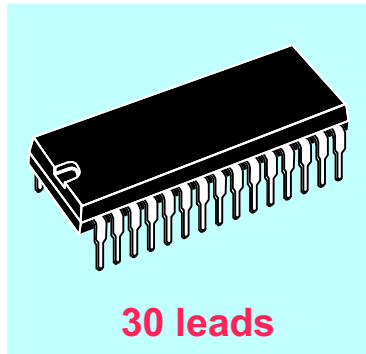

PACKAGE MATERIAL LIST

item #	material	thickness	thermal conductivity
leadframe	copper	0.25 mm	2.61 W/cm°C
die attach	epoxy glue (silver filler)	10-40 μ m	0.01 W/cm°C
molding compound	epoxy resin	3.8 mm	0.0063W/cm°C

Charts enclosed :

- 1) $R_{th(j-a)}$ vs power dissipation
- 2) $Z_{th(j-a)}$ vs time

