


033643  
 DH0016CN, DH0017CN, DH0018CN High Voltage High Current Drivers

**General Description**

This high-voltage, high-current driver family consists of hybrid integrated circuits which provide a wide range of output currents and output voltages. Applications include driving lamps, relays, cores, and other devices requiring up to 500 mA and

withstanding voltages up to 100V. Logic flexibility is provided through a 4-input NAND gate, a NOR input and an input which bypasses the gating and connects to the base of the output transistor.

**Logic Diagram**

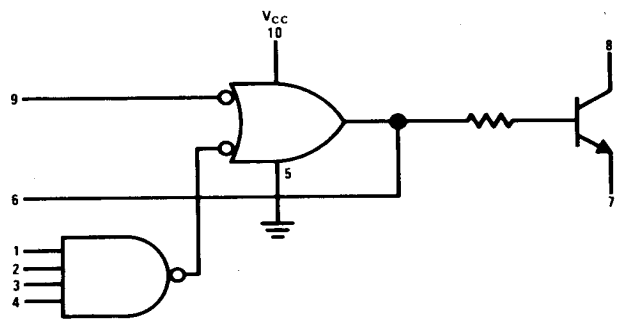

**Ordering Information**

NSC DESIGNATION	PACKAGE	OUTPUT CHARACTERISTICS	
		Maximum Standoff Voltage	Current
DH0016CN	N10B	70V	250 mA
DH0017CN	N10B	50V	500 mA
DH0018CN	N10B	100V	500 mA

### Absolute Maximum Ratings

V <sub>CC</sub>	8V
Input Voltage	8V
Collector Voltage	DH0016CN 70V
	DH0017CN 50V
	DH0018CN 100V
Output Surge Current	DH0016CN 1.0A
	DH0017CN & DH0018CN 2.0A
Power Dissipation	455mW
Operating Temperature Range	0°C to +70°C
Storage Temperature	-65°C to +150°C

### Electrical Characteristics

TEST NO.	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9	PIN 10	SENSE	LIMITS	
												MIN	MAX
2	V <sub>IH</sub>	V <sub>IH</sub>	V <sub>IH</sub>	V <sub>IH</sub>	GND		GND	I <sub>OL1</sub>		V <sub>CC</sub>	V <sub>8</sub>		V <sub>OL1</sub>
3	V <sub>IL</sub>				GND		GND	I <sub>OL1</sub>	V <sub>IL</sub>	V <sub>CC</sub>	V <sub>8</sub>		V <sub>OL1</sub>
4		V <sub>IL</sub>			GND		GND	I <sub>OL1</sub>	V <sub>IL</sub>	V <sub>CC</sub>	V <sub>8</sub>		V <sub>OL1</sub>
5			V <sub>IL</sub>		GND		GND	I <sub>OL1</sub>	V <sub>IL</sub>	V <sub>CC</sub>	V <sub>8</sub>		V <sub>OL1</sub>
6				V <sub>IL</sub>	GND		GND	I <sub>OL1</sub>	V <sub>IL</sub>	V <sub>CC</sub>	V <sub>8</sub>		V <sub>OL1</sub>
7	V <sub>IL</sub>				GND	I <sub>OL2</sub>				V <sub>CC</sub>	V <sub>6</sub>		V <sub>OL2</sub>
8		V <sub>IL</sub>			GND	I <sub>OL2</sub>				V <sub>CC</sub>	V <sub>6</sub>		V <sub>OL2</sub>
9			V <sub>IL</sub>		GND	I <sub>OL2</sub>				V <sub>CC</sub>	V <sub>6</sub>		V <sub>OL2</sub>
10				V <sub>IL</sub>	GND	I <sub>OL2</sub>				V <sub>CC</sub>	V <sub>6</sub>		V <sub>OL2</sub>
11				GND	GND	I <sub>OL2</sub>			V <sub>IH</sub>	V <sub>CC</sub>	V <sub>6</sub>		V <sub>OL2</sub>
12	V <sub>R</sub>	GND	GND	GND	GND				V <sub>CC</sub>	I <sub>1</sub>			I <sub>R</sub>
13	GND	V <sub>R</sub>	GND	GND	GND				V <sub>CC</sub>	I <sub>2</sub>			I <sub>R</sub>
14	GND	GND	V <sub>R</sub>	GND	GND				V <sub>CC</sub>	I <sub>3</sub>			I <sub>R</sub>
15	GND	GND	GND	V <sub>R</sub>	GND				V <sub>CC</sub>	I <sub>4</sub>			I <sub>R</sub>
16					GND				V <sub>R</sub>	V <sub>CC</sub>	I <sub>9</sub>		I <sub>R</sub>
17	V <sub>F</sub>	V <sub>R</sub>	V <sub>R</sub>	V <sub>R</sub>	GND				V <sub>CC</sub>	I <sub>1</sub>			-I <sub>F</sub>
18	V <sub>R</sub>	V <sub>F</sub>	V <sub>R</sub>	V <sub>R</sub>	GND				V <sub>CC</sub>	I <sub>2</sub>			-I <sub>F</sub>
19	V <sub>R</sub>	V <sub>R</sub>	V <sub>F</sub>	V <sub>R</sub>	GND				V <sub>CC</sub>	I <sub>3</sub>			-I <sub>F</sub>
20	V <sub>R</sub>	V <sub>R</sub>	V <sub>R</sub>	V <sub>F</sub>	GND				V <sub>CC</sub>	I <sub>4</sub>			-I <sub>F</sub>
21				GND	GND				V <sub>F</sub>	V <sub>CC</sub>	I <sub>9</sub>		-I <sub>F</sub>
22					GND		GND		V <sub>CC</sub>	V <sub>6</sub>		V <sub>OH1</sub>	
23	GND				GND	I <sub>OL3</sub>	GND	V <sub>OX</sub>		V <sub>CC</sub>	I <sub>8</sub>		I <sub>OX</sub>
24					GND					V <sub>PD</sub>	I <sub>10</sub>		I <sub>PD</sub>
25	GND				GND				GND	V <sub>MAX</sub>	I <sub>10</sub>		I <sub>MAX</sub>


### Forcing Functions

SYMBOL	0°C	+25°C	+70°C	UNITS
V <sub>CC</sub>	5.0	5.0	5.0	V
V <sub>PD</sub>		5.0		V
V <sub>MAX</sub>		8.0		V
V <sub>IL</sub>	0.85	0.85	0.85	V
V <sub>IH</sub>	1.9	1.8	1.6	V
V <sub>R</sub>	4.5	4.5	4.5	V
V <sub>F</sub>	0.45	0.45	0.45	V
V <sub>OX</sub> (DH0016CN)		70	70	V
V <sub>OX</sub> (DH0017CN)		50	50	V
V <sub>OX</sub> (DH0018CN)		100	100	V
I <sub>OL1</sub> (DH0017CN, DH0018CN)	500	500	500	mA
I <sub>OL1</sub> (DH0016CN)	250	250	250	mA
I <sub>OL2</sub>	16	16	16	mA
I <sub>OL3</sub>		8.0		mA


## Test Limits

SYMBOL	0° C	+25° C	+70° C	UNITS
$V_{OL1}$	0.6	0.6	0.6	V
$V_{OL2}$	0.45	0.45	0.45	V
$V_{OHI}$	1.95	1.85	1.65	V
$I_R$		60	60	$\mu A$
$-I_F$	1.6	1.6	1.6	mA
$I_{OX}$		5.0	200	$\mu A$
$I_{PD}$		12.2		mA
$I_{MAX}$		10		mA


Typical Output Voltages vs Temperature




Typical Switching Times  $I_C = 250$  mA  
DH0016CN



Typical Switching Times  $I_C = 500$  mA  
DH0017CN, DH0018CN



## Switching Time Test Circuit

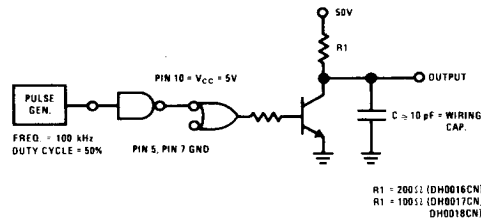

## Switching Time Waveform

