


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

2029-15-9

REVISIONS	
ISSUE	CHANGES
0	ER 32981 JCA 03/20/91
1	CN 35329 C KVH 02/16/94
2	CN 38020 C TML 06/12/00

2029159S

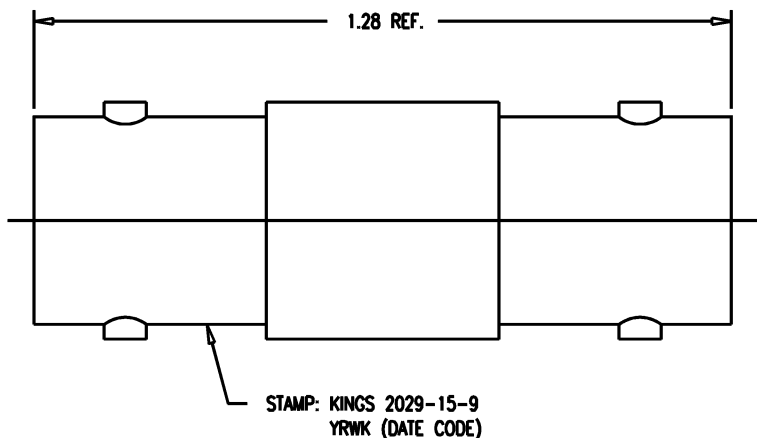

NOTES:

- INTERFACES PER MIL-STD-348, FIG. 301-2 (AS APPLICABLE)..
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACT : HARD GOLD PLATE PER MIL-STD-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 2 GHz

SCALE 4:1	
APPROX SURFACE AREA	
WAS: JCA1498	
USED ON	
REF:	
ADPT, F-F, 75 BNC-75 BNC	
DRAWN JCA	DATE 03/20/91
DESIGN GA	DATE 03/21/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2029-15-9

GSD

<p>UNLESS OTHERWISE SPECIFIED</p> <p>1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 3 PLACE DECIMALS ± .004 ANGLES ± 1° CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.</p>	<p>2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. 3. NO FILLETS PERMITTED. 4. SURFACE ROUGHNESS 63 MICRONS RMS MAX. 5. ALL DIMENSIONS PRIOR TO PLATING. 6. ALL PLATING IN ACCORDANCE WITH KER 10004.</p>	<p>7. ALL LEAD THREADS TO BE CHAMFERED 45° TO ROOT DIAMETER. * CRITICAL DIMENSIONS</p>
--	--	--