



N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35028-30

N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS

Configuration

Connector 1	N Male
Connector 2	N Male
Cable Type	165 Series

Electrical Specifications

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.4:1
Velocity of Propagation, %	69.5
RF Shielding, dB	90
Maximum Operating Voltage, Vrms	1,900

Typical Performance by Frequency

Frequency 1

Frequency, GHz	2
VSWR	1.03:1
Insertion Loss	0.21 dB/ft [0.69 dB/m]

Frequency 2

Frequency, GHz	6
VSWR	1.08:1
Insertion Loss	0.31 dB/ft [1.02 dB/m]

Frequency 3

Frequency, GHz	10
VSWR	1.12:1
Insertion Loss	0.4 dB/ft [1.31 dB/m]

Frequency 4

Frequency, GHz	14
VSWR	1.18:1
Insertion Loss	0.5 dB/ft [1.64 dB/m]

Frequency 5

Frequency, GHz	18
VSWR	1.3:1
Insertion Loss	0.6 dB/ft [1.97 dB/m]

Electrical Specification Notes:

Short lengths up to 24" long may exhibit VSWR measurements up to 9% higher.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS PE35028-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35028-30

Mechanical Specifications

Cable Assembly

Cable Type 165 Series

Temperature

Temperature Operating Range, deg C -50 to +205

Size

Length, in [mm] 30 [762]

One Time Minimum Bend Radius, in [mm] 1 [25.4]

Cable

Center Conductor Type Solid
 Cable Inner Conductor Beryllium Copper, Silver
 No of Shields 3
 Dielectric Type PTFE
 Jacket Material FEP
 Jacket Diameter, in [mm] 0.165 [4.19]

Connector 1

Type N Male
 Configuration Straight
 Inner Conductor Material and Plating Gold
 Coupling Nut Material and Plating Passivated Stainless Steel
 Body Material and Plating Passivated Stainless Steel
 Dielectric Type PTFE

Connector 2

Type N Male
 Configuration Straight
 Inner Conductor Material and Plating Gold
 Coupling Nut Material and Plating Passivated Stainless Steel
 Body Material and Plating Passivated Stainless Steel
 Dielectric Type PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS PE35028-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35028-30

Plotted and Other Data

Notes:

Values at 25 °C, sea level

N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS PE35028-30](http://www.pasternack.com/n-male-n-male-165-non-magnetic-series-cable-assembly-pe35028-30-p.aspx)

URL: <http://www.pasternack.com/n-male-n-male-165-non-magnetic-series-cable-assembly-pe35028-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE35028-30 CAD Drawing

N Male to N Male Precision Cable 30 Inch Length Using 165 Series Coax, RoHS

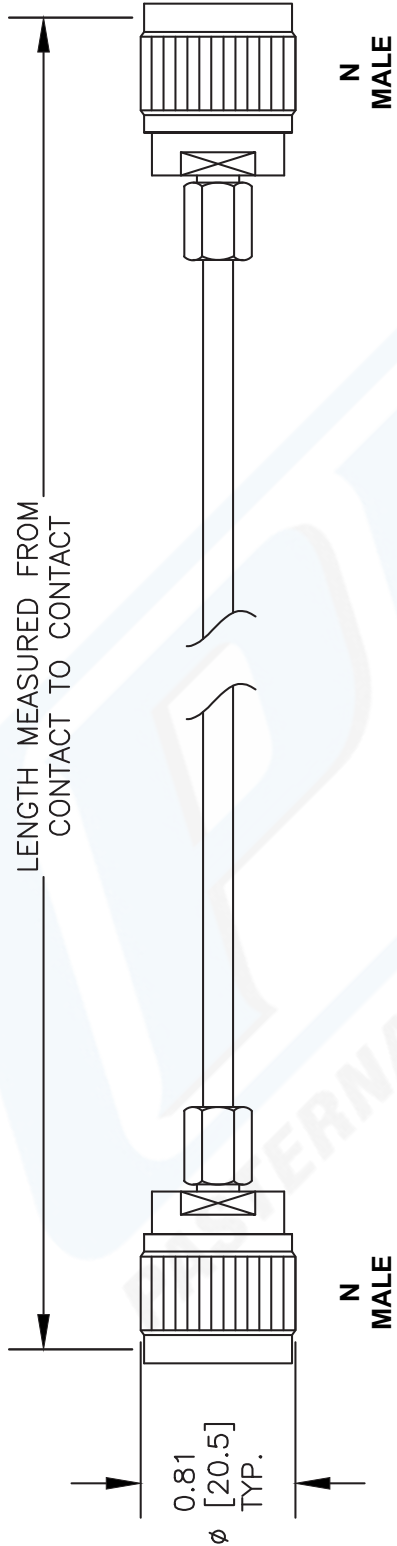

Part Number Configuration		How To Order	
PE3	zzz yy - xx uu	Part # Ext.	Length In Inches
00 - 99999		-12	12"
LF = RoHS Compliant		-24	24"
< Blank > = Standard		-36	36"
Note: LF applies only to RF cables		-48	48"
		-60	60"
		-xx	Custom Length
			Length
		Part # Ext.	Length In Centimeters
		-25CM	25Cm
		-50CM	50Cm
		-75CM	75Cm
		-100CM	100Cm
		-125CM	125Cm
		-xxCM	Custom Length

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE35028

PE PASTERNAK
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 030508 SCALE N/A SIZE A XXXX